




RICARDO

SILENT DIESEL ENGINE GENERATOR

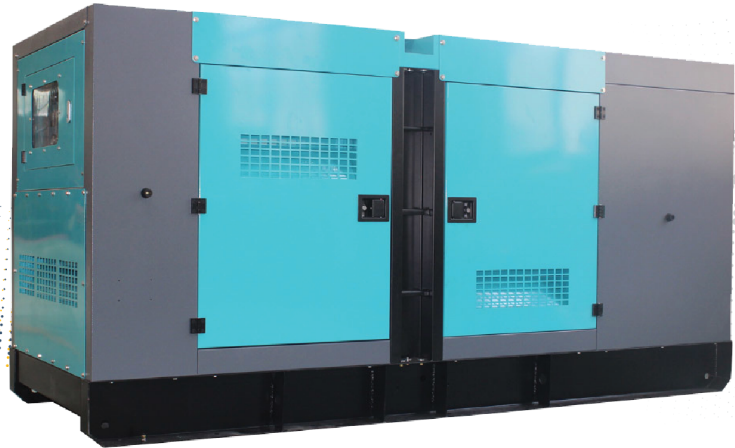

Specifications 50Hz 400-230V

General Specification

GENTSETS	KVA/KW Cos 0.8		Engine Type	Max Output kW	CYL	Bore mm	Stroke mm	GOV.	Compact Version	
	Standby Power	Prime Power							Dimension L x W x H (mm)	Weight kg
LG8KF	11/9	10/8	Y480BD	14	4L	80	90	Natural	1300x700x1000	520
LG10KF	14/11	13/10	Y480BD	14	4L	80	90	Natural	1300x700x1000	530
LG12KF	17/13	15/12	Y480BD	14	4L	80	90	Natural	1300x700x1000	540
LG15KF	21/17	19/15	Y485BD	17	4L	85	90	Natural	1300x700x1000	550
LG18KF	26/20	23/18	Y486BZD	22	4L	85	90	Turbocharged	1300x700x1000	550
LG20KF	28/22	25/20	Y485BZD	22	4L	85	90	Turbocharged	1300x700x1000	550
LG20KF	28/22	25/20	Y485BZLD	26	4L	85	90	Turbo & inter-cooled	1300x700x1000	550
LG24KF	33/26	30/24	Y485BZLD	26	4L	85	90	Turbo & inter-cooled	1300x700x1000	550
LG20KF	28/22	25/20	N4100DS-26	26	4L	95	115	Natural	1700x800x1150	600
LG24KF	33/26	30/24	N4100DS-30	30	4L	95/100	115	Natural	1700x800x1150	610
LG30KF	41/33	38/30	N4105DS-38	38	4L	105	125	Natural	1900x800x1200	750
LG40KF	55/44	50/40	N4105DS-46	38	4L	105	125	Natural	1900x800x1200	750
LG40KF	55/44	50/40	N4105ZD	56	4L	105	120	Turbocharged	1900x800x1230	840
LG50KF	69/55	63/50	N4105ZD	56	4L	105	125	Turbocharged	1900x800x1230	840
LG50KF	69/55	63/50	N4105ZLD	66	4L	105	125	Turbo & inter-cooled	1900x800x1230	840
LG60KF	83/66	75/60	N4105ZLD	66	4L	105	125	Turbo & inter-cooled	1900x800x1230	840
LG40KF	69/55	63/50	R4105ZD1	58	4L	105	125	Turbocharged	1900x800x1230	850
LG50KF	69/55	63/50	R4105ZD1	56	4L	105	125	Turbocharged	1900x800x1230	850
LG50KF	69/55	63/50	R4105ZLDS1	66	4L	105	125	Turbo & inter-cooled	1900x800x1230	890
LG60KF	83/66	75/60	R4105ZLDS1	66	4L	105	125	Turbo & inter-cooled	1900x800x1230	900
LG50KF	69/55	63/50	R4105BZDS1	60	4L	105	125	Turbocharged	1900x800x1230	890
LG60KF	83/66	75/60	R4105BZLDS1	72	4L	105	125	Turbo & inter-cooled	1900x800x1230	900
LG64KF	88/70	80/64	R6105ZDS1	84	6L	105	125	Turbocharged	2200x900x1450	1000